


DIMENSIONS (IN INCHES)

Dimensions are based on measurements to the outside of the frame of an Original Edge Type 2.

- Classic Edge Type 1 will be slightly larger.
- Original Edge Type 1 will be slightly smaller.
- Tiled pads: 1/4" thick. Stone and Brick pads: 1/2" thick.
- Type I max size is 54" x 48".
- We gladly make custom sizes and shapes.

Shapes (inches)	A	B	C	D	E	F
EXTENSION						
12 Extension	12	48	7 3/4	39 1/2	6	NA
18 Extension	18	48	13 3/4	39 3/4	6	NA
CORNER (SL)						
32 SL	32	32	26 1/2	26 1/2	8	42
36 SL	36	36	30 1/2	30 1/2	12	43
40 SL	40	40	31 1/2	31 1/2	12	50
48 SL	48	48	37 1/2	37 1/2	15	60
54 SL	54	54	43 1/2	43 1/2	15	69
60 SL	60	60	49 1/2	49 1/2	15	77
STANDARD (DL)						
32 DL	32	32	26 1/2	20 1/2	8	NA
36 DL	36	36	30 1/2	24 1/2	8	NA
40 DL	40	40	31 1/2	23	12	NA
48 DL	48	48	37 1/2	27	15	NA
48D x 40WDL	48	40	39 1/2	23	12	NA
48D x 54W DL	48	54	37 1/2	39	15	NA
54D x 48W DL	54	48	43 1/2	27	15	NA
54 DL	54	54	43 1/2	27	15	NA
60 DL	60	60	49 1/2	39	15	NA
OCTAGON (OCT)						
24x32 OCT	24	32	16	23 1/2	6	NA
24x36 OCT	24	36	16	27 1/2	6	NA
WALL (SQ)						
36x48 SQ	48	36	NA	NA	NA	NA
40x48 SQ	48	40	NA	NA	NA	NA
48x48 SQ	48	48	NA	NA	NA	NA
54x48 SQ	48	54	NA	NA	NA	NA

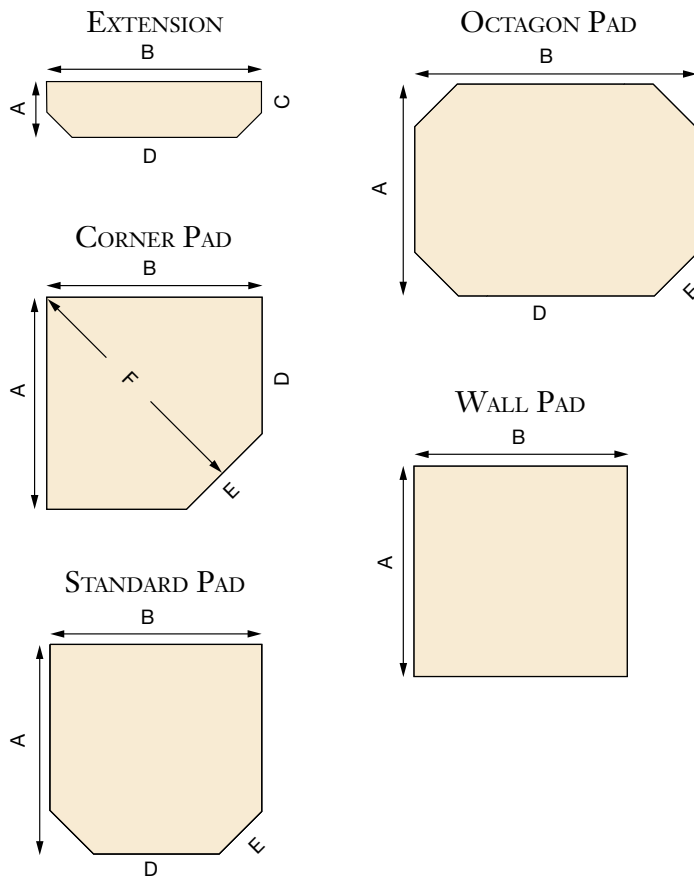

WHICH DO I NEED?

TYPE 1 – EMBER PROTECTION

(ORIGINAL EDGE ONLY - MAX SIZE 54"x48")

All wood, pellet, coal, corn and most gas stoves require hearth protection. But some newer stoves produce enough heat directed down and forward that at a Type 1 – Ember Protector won't stop the heat from passing through to the floor beneath your stove. This can be hazardous.

TYPE 2 – THERMAL PROTECTOR

(R-VALUE 1.61)

For today's highly efficient stoves, a Hearth Classics non-combustible ThermaShield™ pad will block the heat from passing through to your subfloor. For stoves requiring a higher R-value, a ThermaShield™ Low-Profile or 6" pedestal can increase the protection to R=10.